


CB-S500

侧出式砂缸

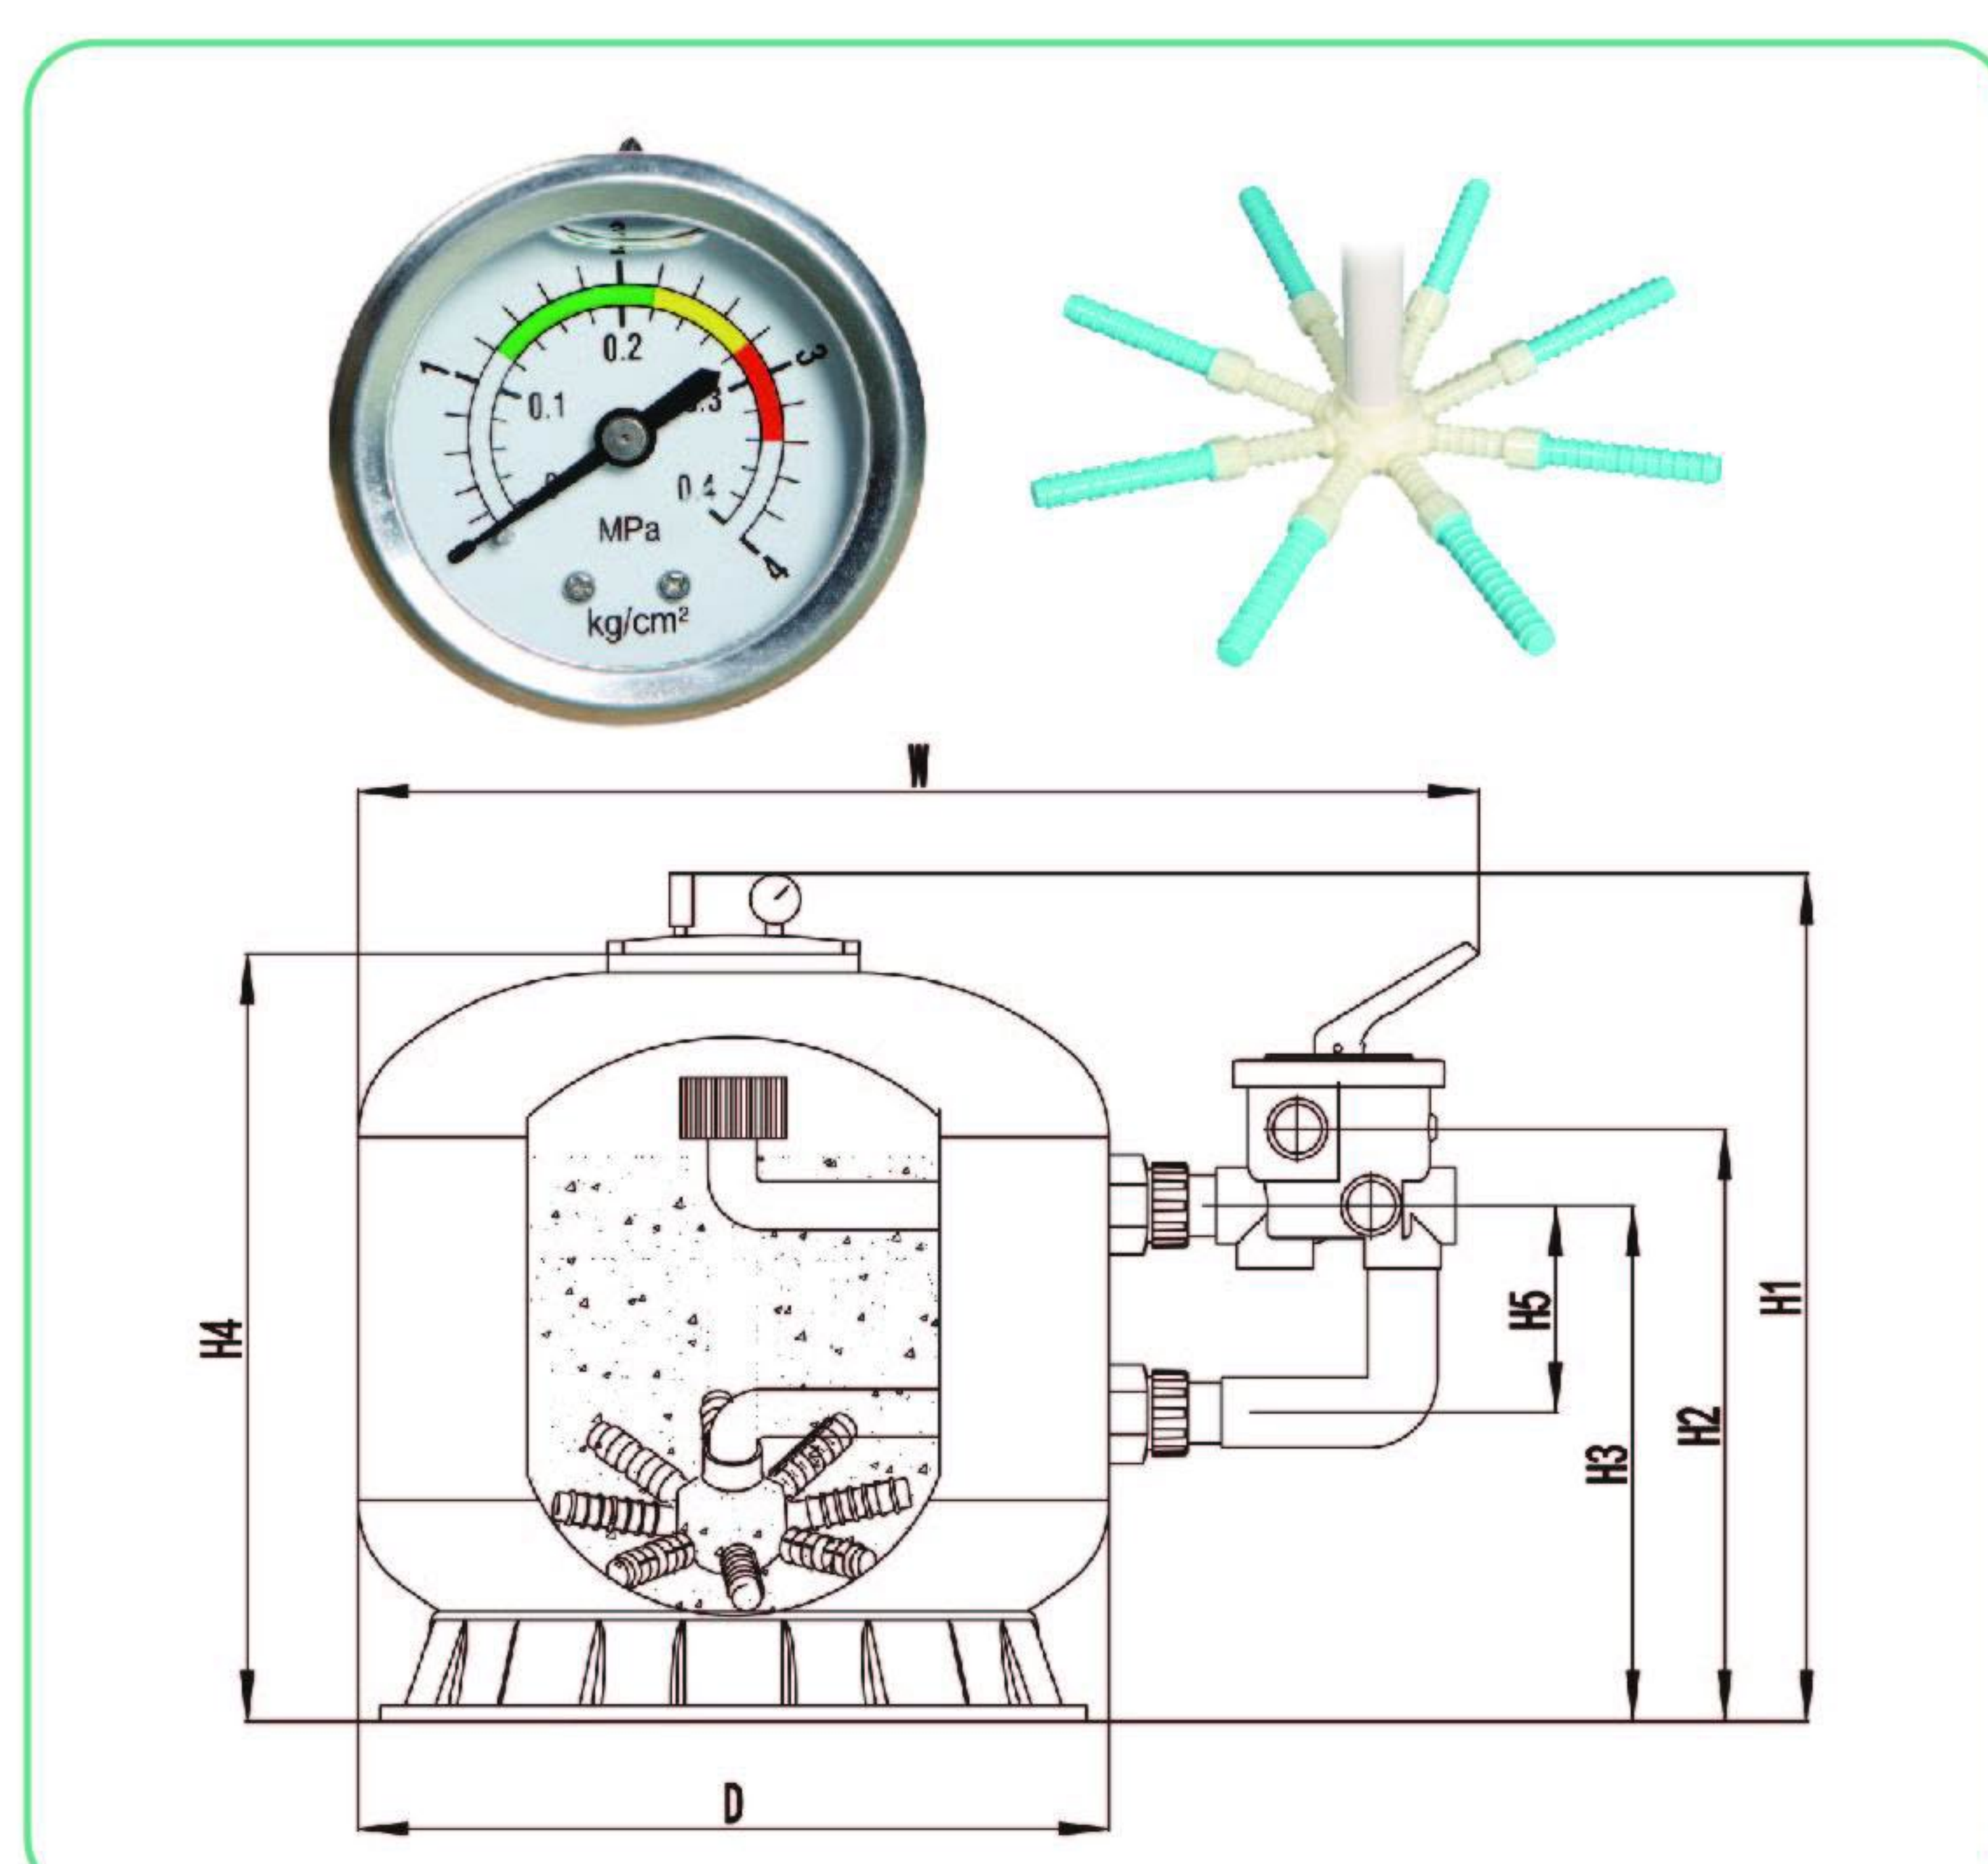

特点 Features

缸体为玻璃纤维增强塑料缠绕成型而成，耐磨损、耐腐蚀、不易变形。设计独特的布水器能均匀的稳定水流，暗渠排水系统效率高。易于安装，维修、保养方便。出水浊度小于2度。

Tank : voluble molding of fiber glass reinforced plastics , corrosion resistant , good abrasion resistance , deforming-proof . Uniquely distribution make a stable and even water flow to improve drainage system . Easy to install , maintain free . Outlet turbidity : < 2FTU .

安装尺寸 Installation Dimensions

型号 Model	安装尺寸 (mm)						
	D	H1	H2	H3	H4	H5	W
CB-S500	500	710	465	400	600	150	860
CB-S550	550	725	490	425	610	150	910
CB-S600	600	730	495	430	620	150	960
CB-S650	650	805	515	450	695	150	1010
CB-S700	700	825	535	470	715	150	1060
CB-S750	750	875	615	540	765	200	1140
CB-S800	800	925	625	550	815	200	1190
CB-S900	900	1000	695	620	900	200	1290
CB-S1050	1050	1175	775	700	1065	200	1440
CB-S1200	1200	1310	855	780	1200	200	1590

102 / DXD

DXD SIDE-MOUNTED SAND FILTER SERIES 侧出式砂缸

CB-S500

工作条件 Working Conditions

最大工作压力: 2.5kg/cm² (35psi)

工作压力为4kg/cm² 可按需定制

最高承受温度: 45°C

Maximum working pressure: 2.5kg/cm² (35psi)

Working pressure of 4kg/cm² available by special order

Maximum temperature: 45°C



特点 Features

- 缸身有防紫外线的聚氨酯保护层；
- 人体工学设计的六向阀门；
- 防化学腐蚀；
- 系统运行压力可通过压力表实时监测；
- 具有反冲洗功能需要时只需简单操作，从而免去额外的维护费用；
- 大口径底排砂阀便于清理或更换缸内的过滤砂。

Tank body has twin heavy duty anti-UV polyurethane protective layer.
Ergonomically designed six position multiport valve.
Chemical resistance
Pressure gauge for inspection of operating pressure.
Virtually maintenance free, simply backwash filter when required.
Sand drain plug for easier sand removal-replacement.

技术参数 Technical Parameter List

型号 Model	砂缸直径 Filter Diameter		砂缸总高 Filter height		设计流量 flow		过滤面积 filter area		出入口口径 connections		所需砂量 required	包装尺寸 package	净重 (Nw)	毛重 (Gw)
	mm	inches	mm	inches	m ³ /h	GPM	m ²	sq.ft	mm	inches	kg	mm	kg	kg
CB-S500	500	19.7	710	28.0	11	48	0.18	1.8	50	1.5"	58	520*520*610	12.7	16.7
CB-S550	550	21.7	725	28.5	13	57	0.20	2.0	50	1.5"	87	550*550*650	15.6	20.1
CB-S600	600	23.6	730	28.7	14	62	0.22	2.2	50	1.5"	115	620*620*665	16.9	21.4
CB-S650	650	25.6	805	31.7	17	75	0.32	3.1	50	1.5"	145	680*680*725	20	25.5
CB-S700	700	27.6	825	32.5	19	84	0.35	3.4	50	1.5"	180	720*720*755	22.3	27.8
CB-S750	750	29.5	875	34.4	21	92	0.40	3.9	63	2"	225	750*750*800	25.7	32.7
CB-S800	800	31.5	925	36.4	24	106	0.50	4.9	63	2"	275	810*810*855	28.8	36.3
CB-S900	900	35.4	1010	39.8	30	132	0.64	6.3	63	2"	390	920*920*965	35.4	44.9
CB-S1050	1050	41.3	1175	46.3	38	167	0.88	8.6	63	2"	615	1055*1055*1150	53.3	58.8
CB-S1200	1200	47.2	1310	51.6	42	185	1.13	11.1	63	2"	920	1215*1215*1250	59.8	65.4

103 / DXD