


CB-T400

顶出式砂缸

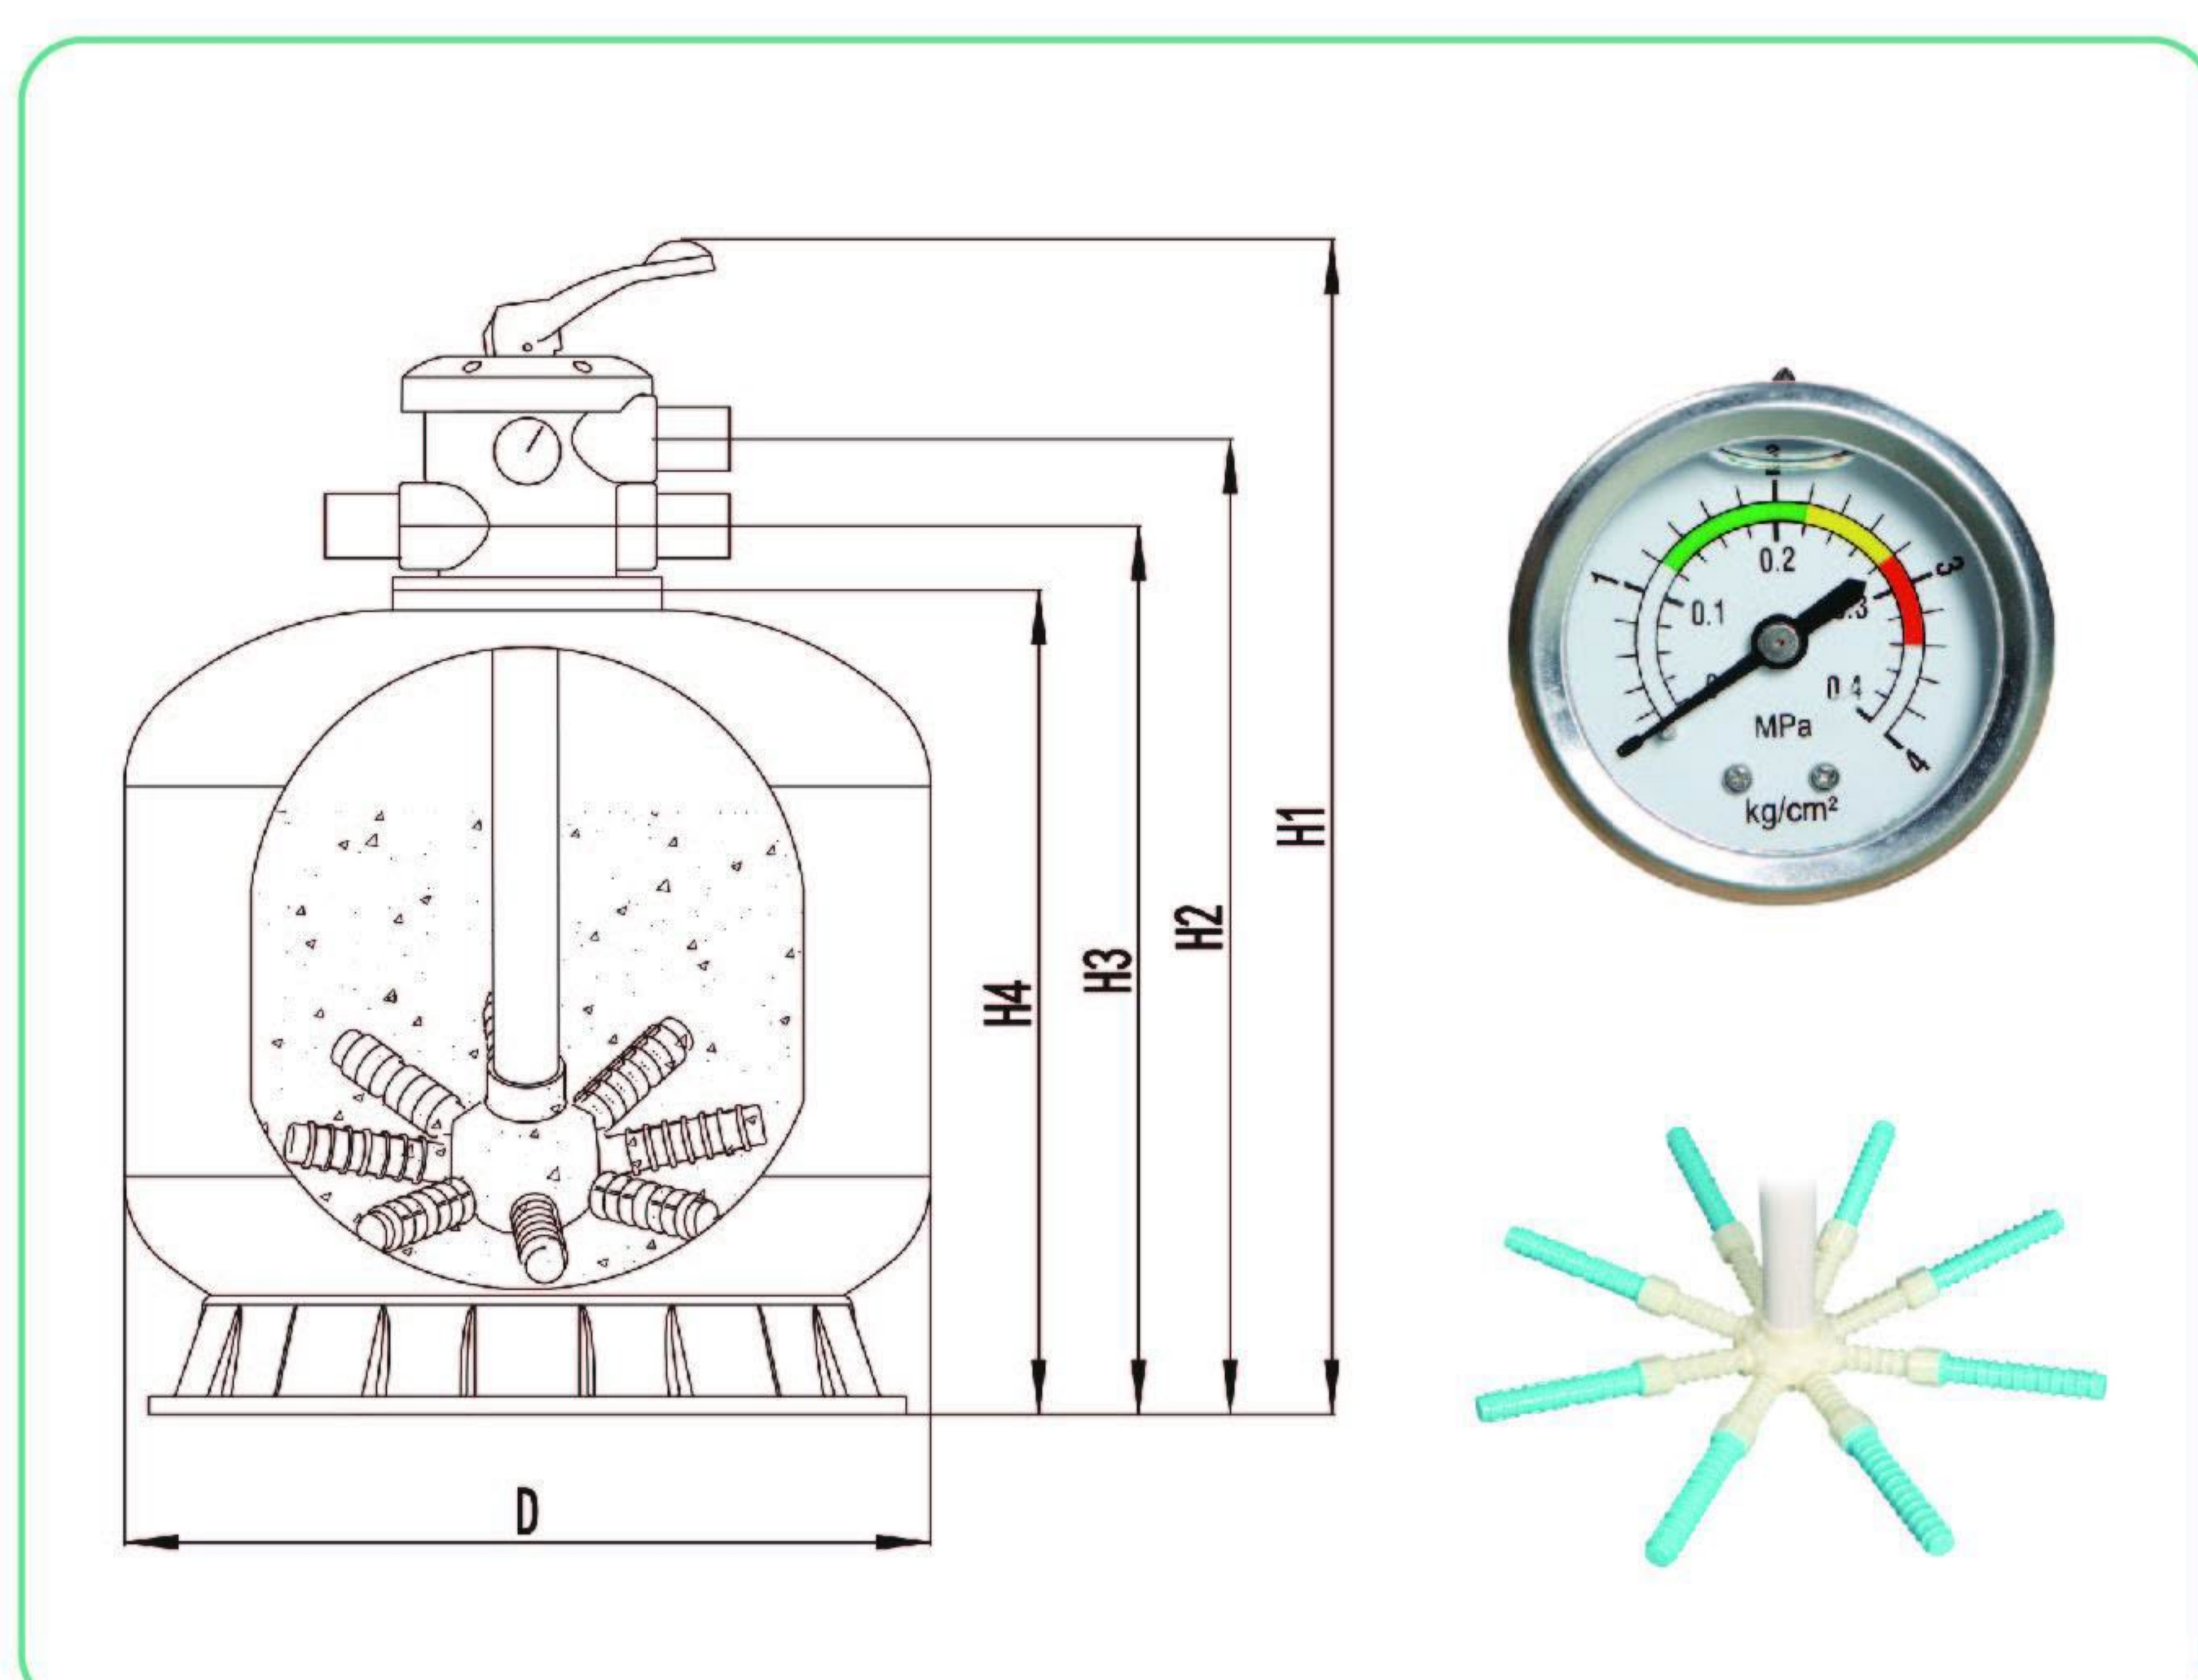

特点 Features

缸体为玻璃纤维增强塑料缠绕成型而成, 耐磨损、耐腐蚀、不易变形。设计独特的布水器能均匀的稳定水流, 暗渠排水系统效率高。易于安装, 维修、保养方便。出水浊度小于2度。

Tank: vulable molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof. Uniquely destribution make a stable and even water flow to improve drainage system. Easy to install, maintain free. Outlet turbidity: < 2FTU.

安装尺寸 Installation Dimensions

型号 Model	安装尺寸 (mm)				
	D	H1	H2	H3	H4
CB-T400	400	680	539	475	425
CB-T450	450	740	599	535	485
CB-T500	500	815	674	610	560
CB-T550	550	875	734	670	620
CB-T600	600	885	744	680	650
CB-T650	650	950	809	745	695
CB-T700	700	970	829	765	715
CB-T750	750	1080	903	829	765
CB-T800	800	1130	953	879	815
CB-T900	900	1215	1038	964	900
CB-T1050	1050	1380	1203	1129	1065
CB-T1200	1200	1515	1338	1264	1200
CB-T1400	1400	1720	1543	1496	1405

100 / DXD

CB-T400

工作条件 Working Conditions

最大工作压力: 2.5kg/cm² (35psi)

工作压力为4kg/cm² 可按需定制

最高承受温度: 45°C

Maximum working pressure: 2.5kg/cm² (35psi)

Working pressure of 4kg/cm² available by special order

Maximum temperature: 45°C

特点 Features

缸身有防紫外线的聚氨酯保护层;
人体工学设计的六向阀门;
防化学腐蚀;
系统运行压力可通过压力表实时监测;
具有反冲洗功能需要时只需简单操作, 从而免去额外的维护费用;
大口径底排砂阀便于清理或更换缸内的过滤砂。



Tank body has twin heavy duty anti-UV polyurethane protetive layer.
Ergonomically designed six position multiport valve.
Chemical resistance
Pressure gauge for inspection of operating pressure.
Virtually maintenance free, simply backwash filter when required.
Sand drain plug for easier sand removal-replacement.

技术参数 Technical Parameter List

型号 Model	砂缸直径 Filter Diameter		砂缸总高 Filter Height		设计流量 flow		过滤面积 filter area		出入水口径 connections		所需砂量 required	包装尺寸 package	净重 (Nw)	毛重 (Gw)
	mm	inches	mm	inches	m ³ /h	GPM	m ²	sq.ft	mm	inches	kg	mm	kg	kg
CB-T400	400	15.7	680	26.8	8	35	0.13	1.4	50	1.5"	35	440*440*480	7.3	9.8
CB-T450	450	17.7	740	29.1	10	44	0.16	1.6	50	1.5"	50	470*470*540	8.8	11.8
CB-T500	500	19.7	815	32.1	11	48	0.18	1.8	50	1.5"	58	520*520*610	10.7	14.7
CB-T550	550	21.7	875	34.4	13	57	0.20	2.0	50	1.5"	87	550*550*650	12.9	17.4
CB-T600	600	23.6	885	34.8	14	62	0.22	2.2	50	1.5"	115	620*620*665	14.5	19
CB-T650	650	25.6	950	37.4	17	75	0.32	3.1	50	1.5"	145	680*680*725	17.7	23.2
CB-T700	700	27.6	970	38.2	19	84	0.35	3.4	50	1.5"	180	720*720*755	20	25.5
CB-T750	750	29.5	1080	42.5	21	92	0.40	3.9	63	2"	225	750*750*800	22.8	29.8
CB-T800	800	31.5	1130	44.5	24	106	0.50	4.9	63	2"	275	810*810*855	25.9	33.4
CB-T900	900	35.4	1215	47.8	30	132	0.64	6.3	63	2"	390	920*920*965	32.7	42.2
CB-T1050	1050	41.3	1380	54.3	38	167	0.88	8.6	63	2"	615	1055*1055*1150	50.9	56.4
CB-T1200	1200	47.2	1515	59.6	42	185	1.13	11.1	63	2"	920	1215*1215*1250	57.6	63.2
CB-T1400	1400	55.1	1720	67.7	56	246	1.25	12.3	63	2"	1480	1415*1415*1450	69.2	74.7

101 / DXD