

## DXD-320AS

## 工作条件 Working Conditions

介质温度: 5-50°C

环境温度: ≤50°C

湿度: 65% RH


最大工作压力: 0.4Mpa

Medium temperature: 5-50°C


Environmental temperature: ≤50°C

Humidity: 65% RH

Max.working pressure: 0.4Mpa

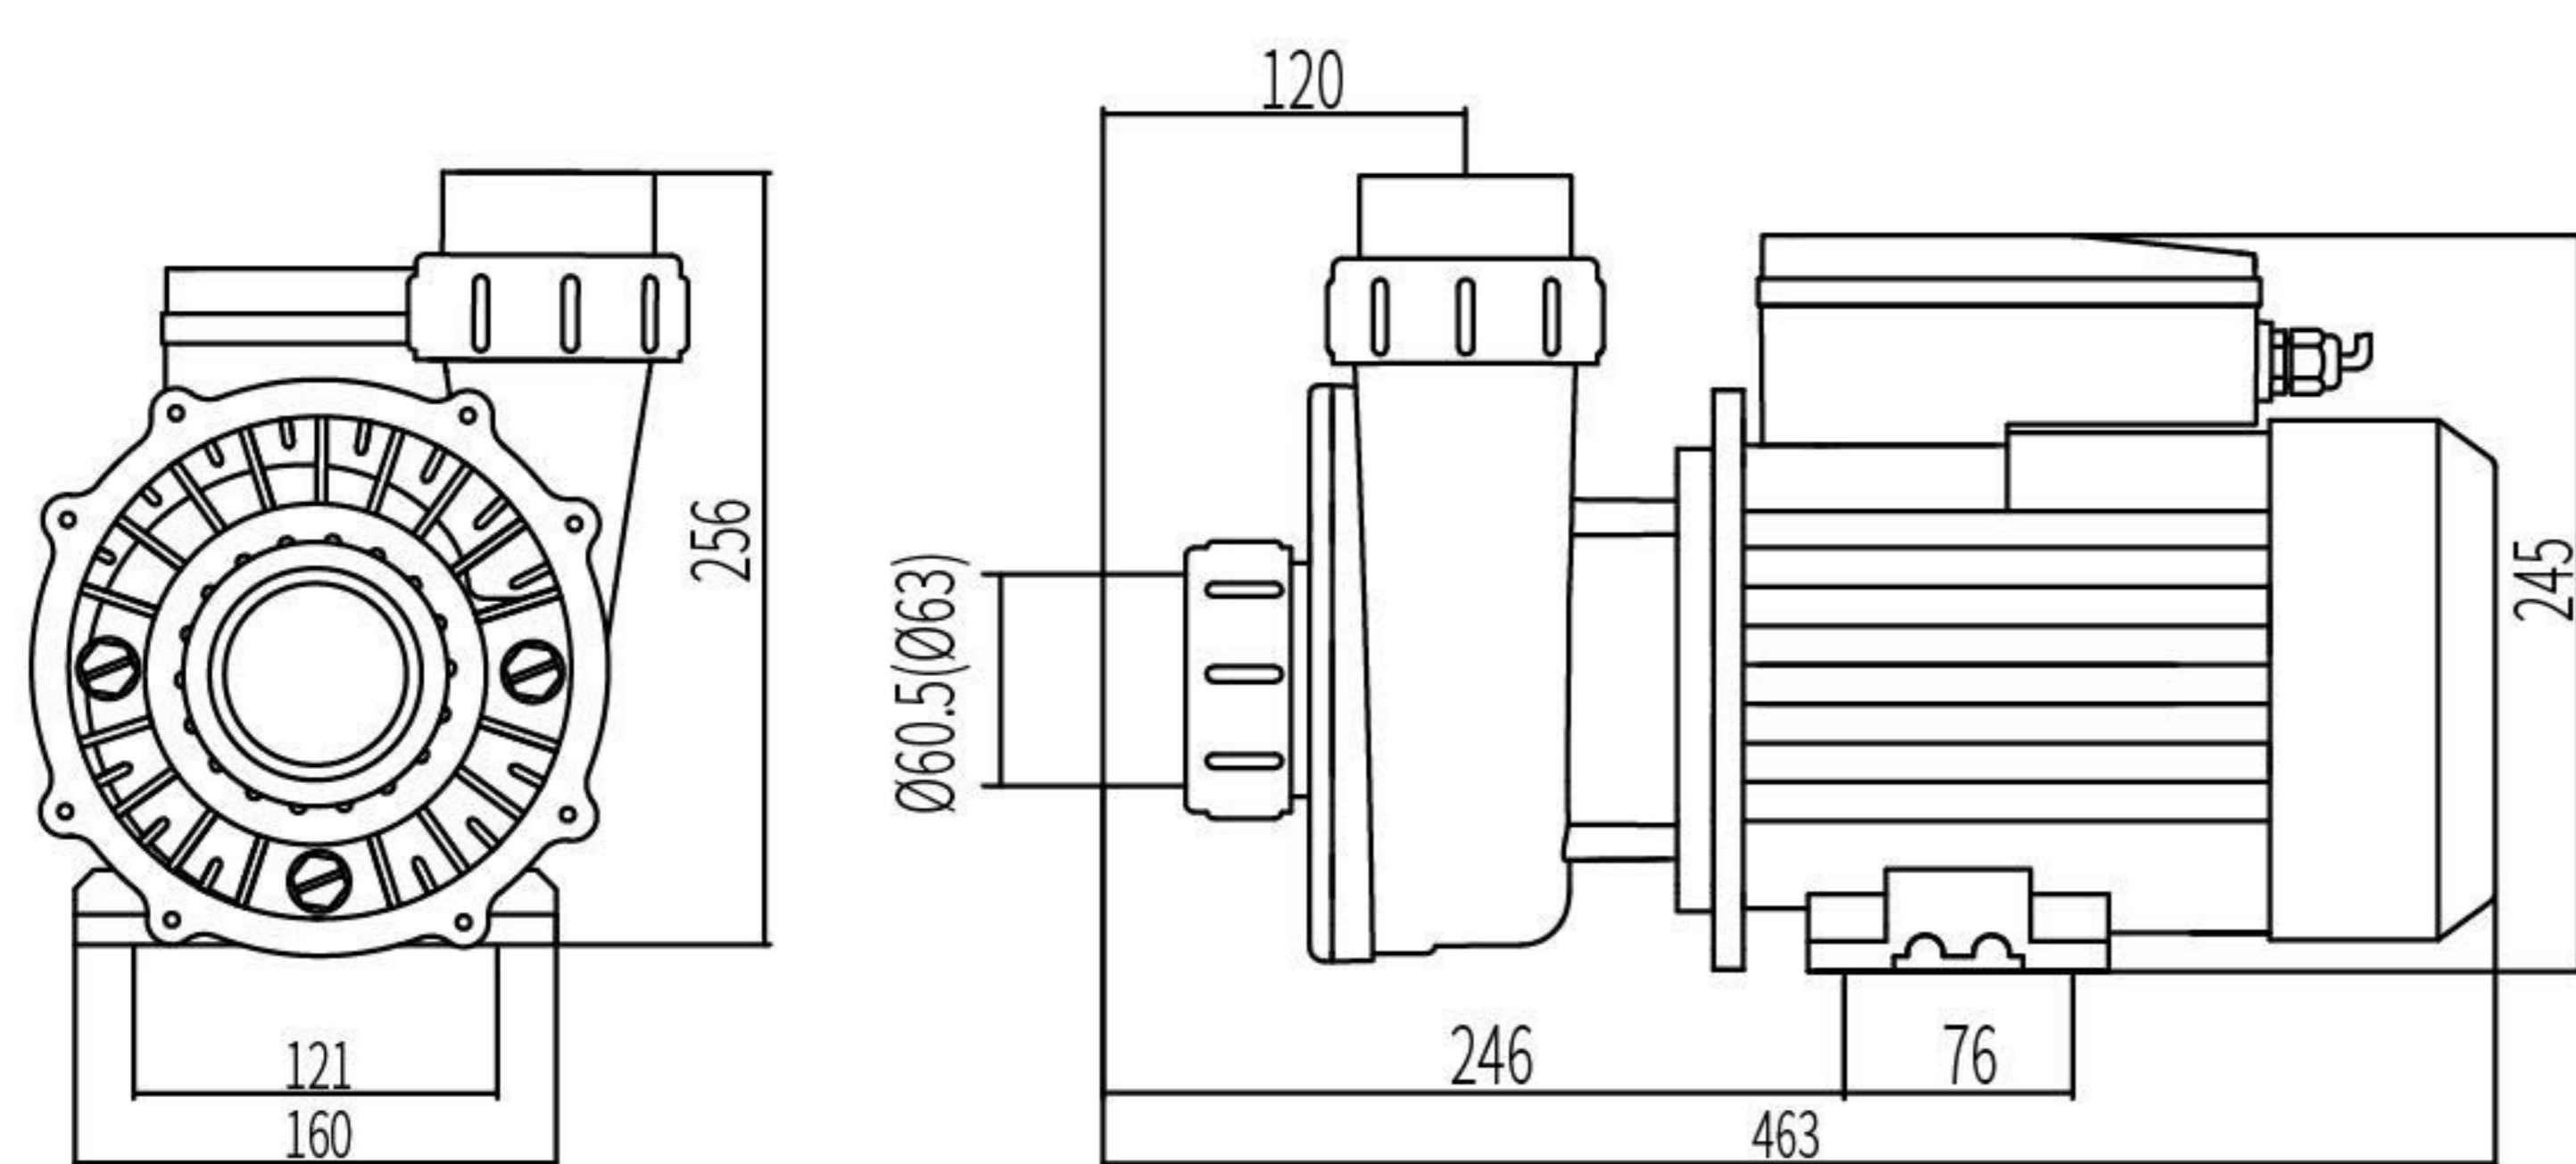

## 性能曲线 Performance Curves

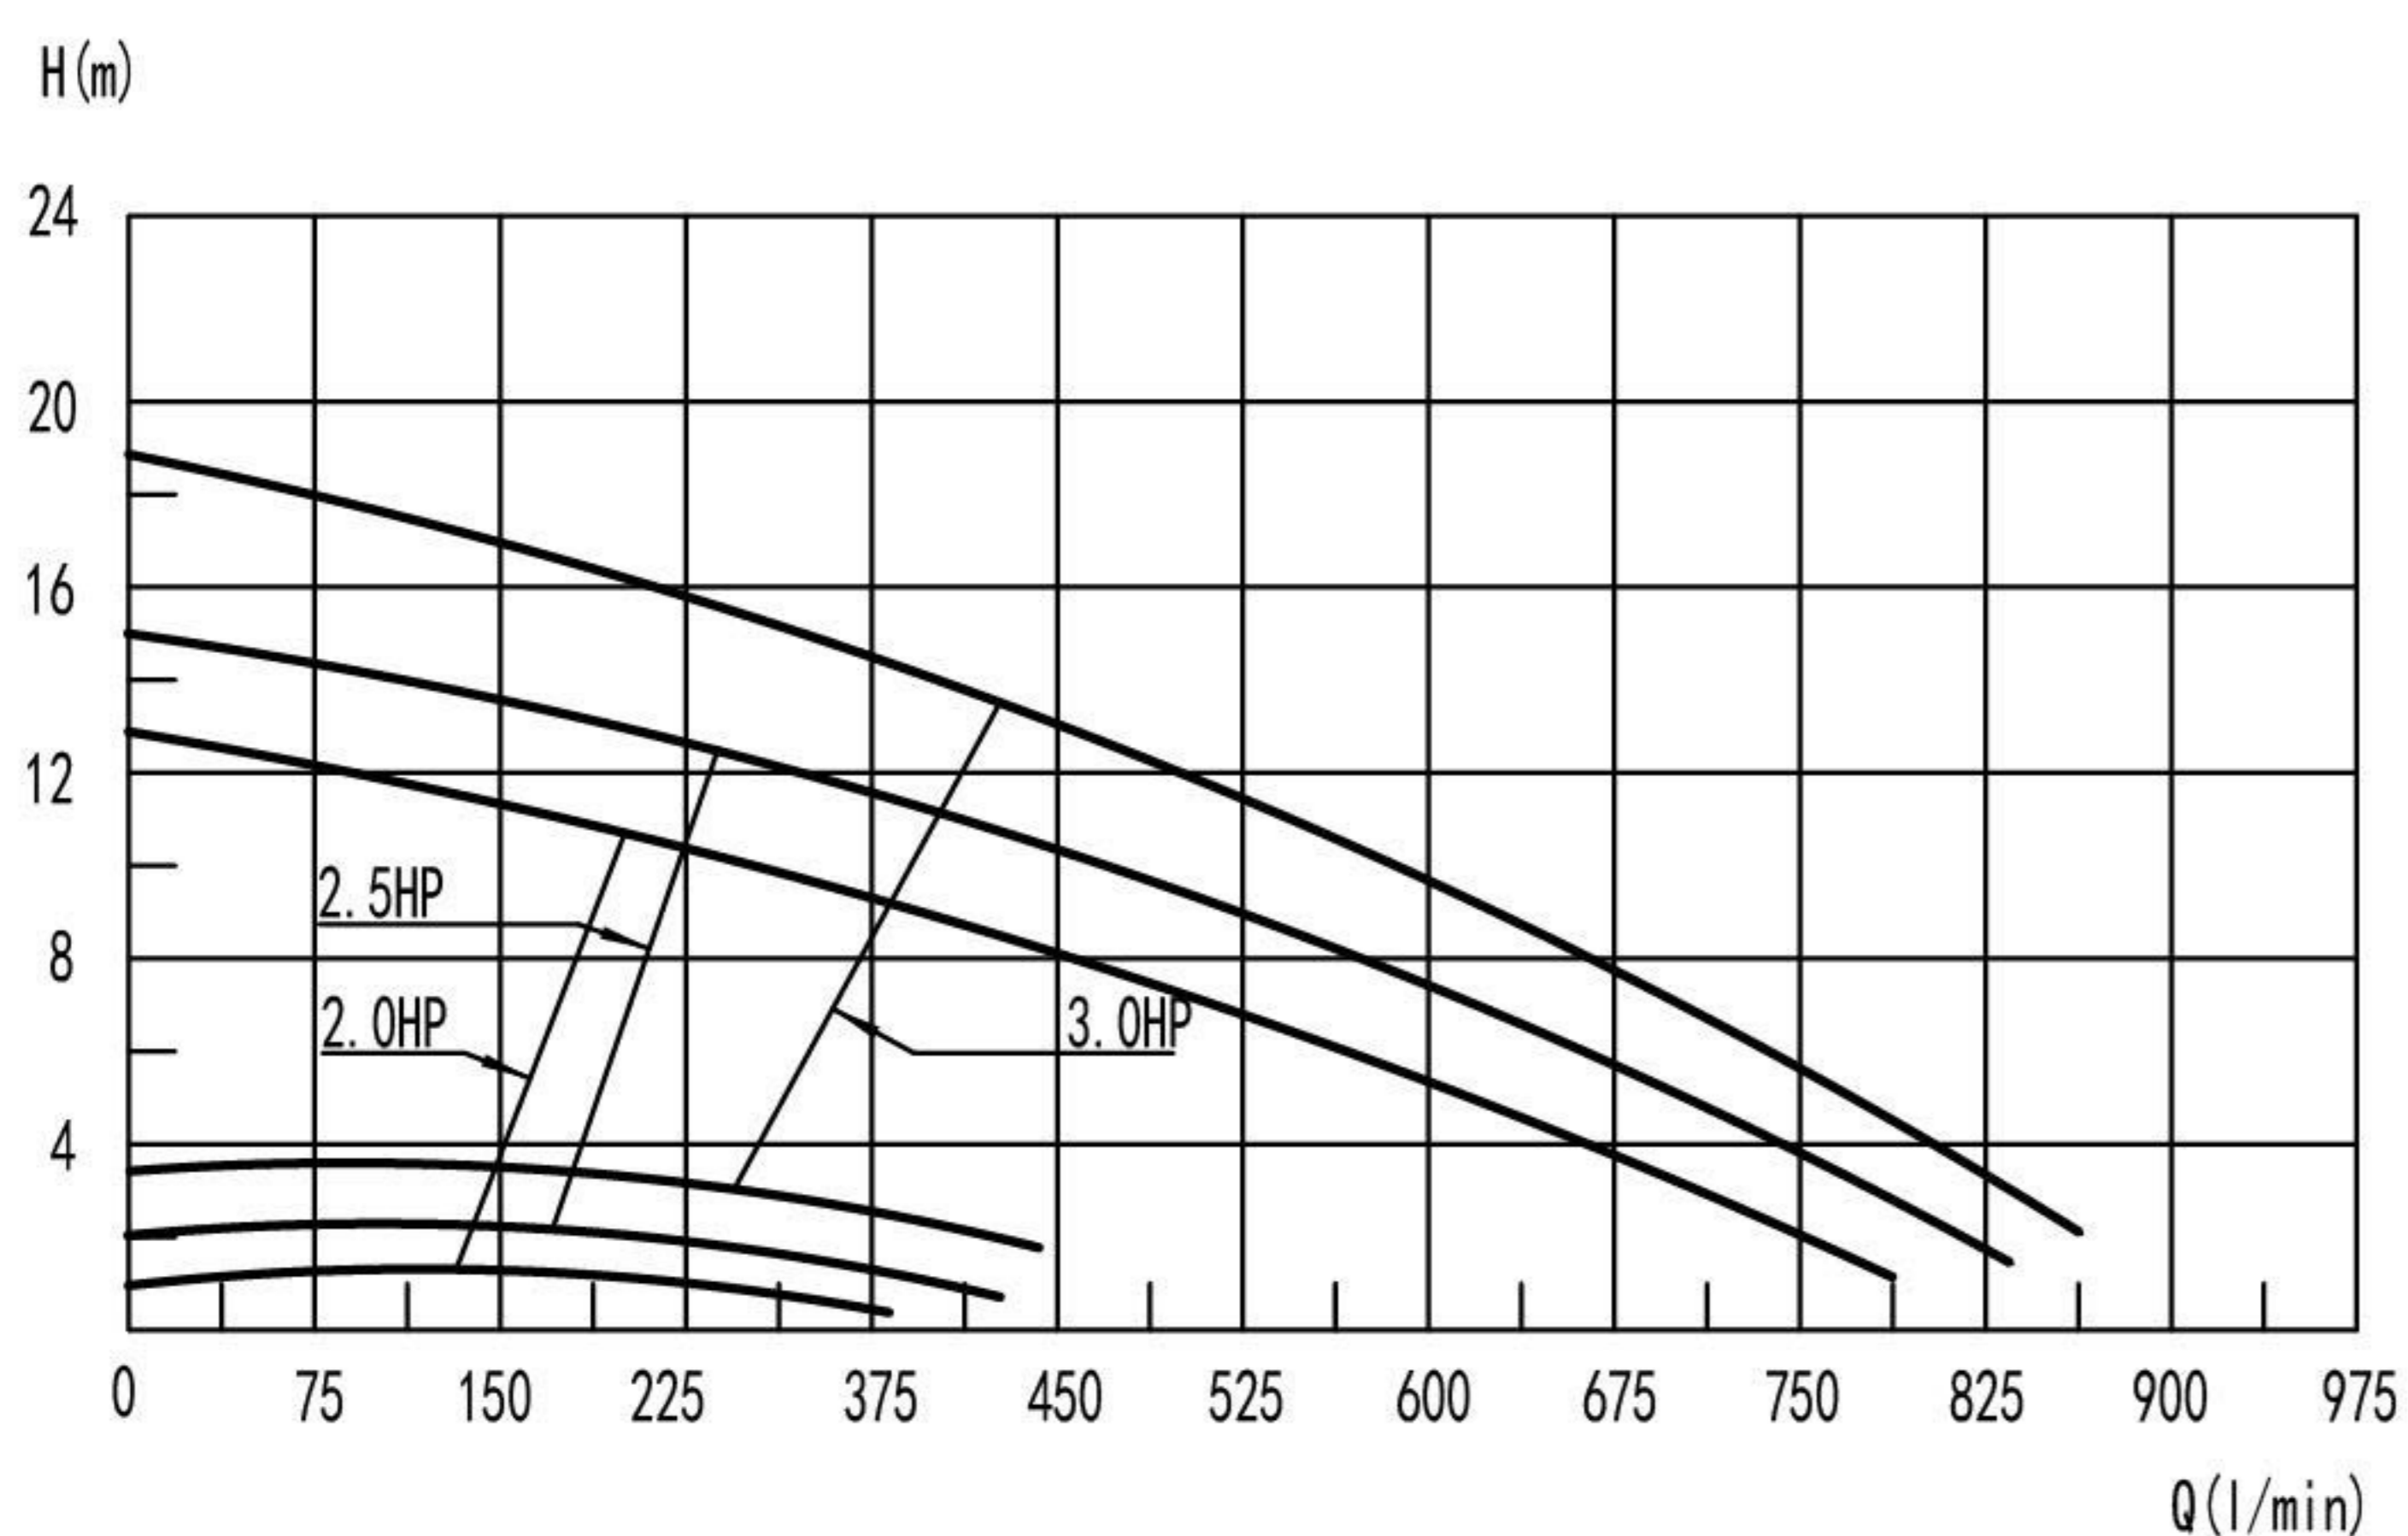

AS/NZS 60335.2.41:2013 Inc A1  
AS/NZS 60335.1:2011 Inc A1-5



IEC60335-1:2010  
IEC60335-1:2010/AMD1:2013  
IEC60335-1:2010/AMD2:2016  
IEC60335-2-41:2012



EN 60335-1:2012/A2:2019  
EN 60335-2-41:2003/A2:2010  
EN 62233:2008



E351970



EN 60335-1:2012/A2:2019  
EN 60335-2-41:2003/A2:2010  
EN 62233:2008

## 技术参数 Technical Parameter List

型号 Model	电压 Voltage	功率 Power		转速 Rotating Speed (r/min)	最大扬程 Maximum Lift (m)	最大流量 Maximum Flow (l/min)	绝缘等级 Insulation Class	防护等级 Protection Grade	毛重 Gross Weight (kg)	认证 Certification
		Kw	HP							
DXD-320AS	230v/50Hz	(high speed) 1.5	2.0	2850	11.0	783	F	IP X5	20.0	
		(low speed) 0.33	0.5	1450	1.5	366				
DXD-325AS	230v/50Hz	(high speed) 1.9	2.5	2850	14.0	833	F	IP X5	20.0	
		(low speed) 0.30	0.5	1450	2.0	422				
DXD-330AS	230v/50Hz	(high speed) 2.1	3.0	2850	15.5	866	F	IP X5	20.0	
		(low speed) 0.4	0.6	1450	3.5	433				
DXD-325CS	230v/60Hz	(high speed) 1.9	2.5	3450	14.0	833	F	IP X5	20.0	
		(low speed) 0.35	0.5	1725	2.0	422				
DXD-330CS	230v/60Hz	(high speed) 2.1	3.0	3450	15.5	866	F	IP X5	20.0	
		(low speed) 0.4	0.6	1725	3.5	433				
DXD-325DS	115v/60Hz	(high speed) 1.9	2.5	3450	14.0	833	F	IP X5	20.0	
		(low speed) 0.35	0.5	1725	2.0	422				
DXD-330DS	115v/60Hz	(high speed) 2.1	3.0	3450	15.5	866	F	IP X5	20.0	
		(low speed) 0.4	0.6	1725	3.5	433				

包装 (Packing): 510mm×220mm×265mm