

DXD-9A

工作条件 Working Conditions

介质温度:5-50°C

环境温度:≤50°C

湿度:65%RH


最大工作压力:0.4Mpa

Medium temperature:5-50°C


Environmental temperature:≤50°C

Humidity: 65% RH

Max.working pressure: 0.4Mpa

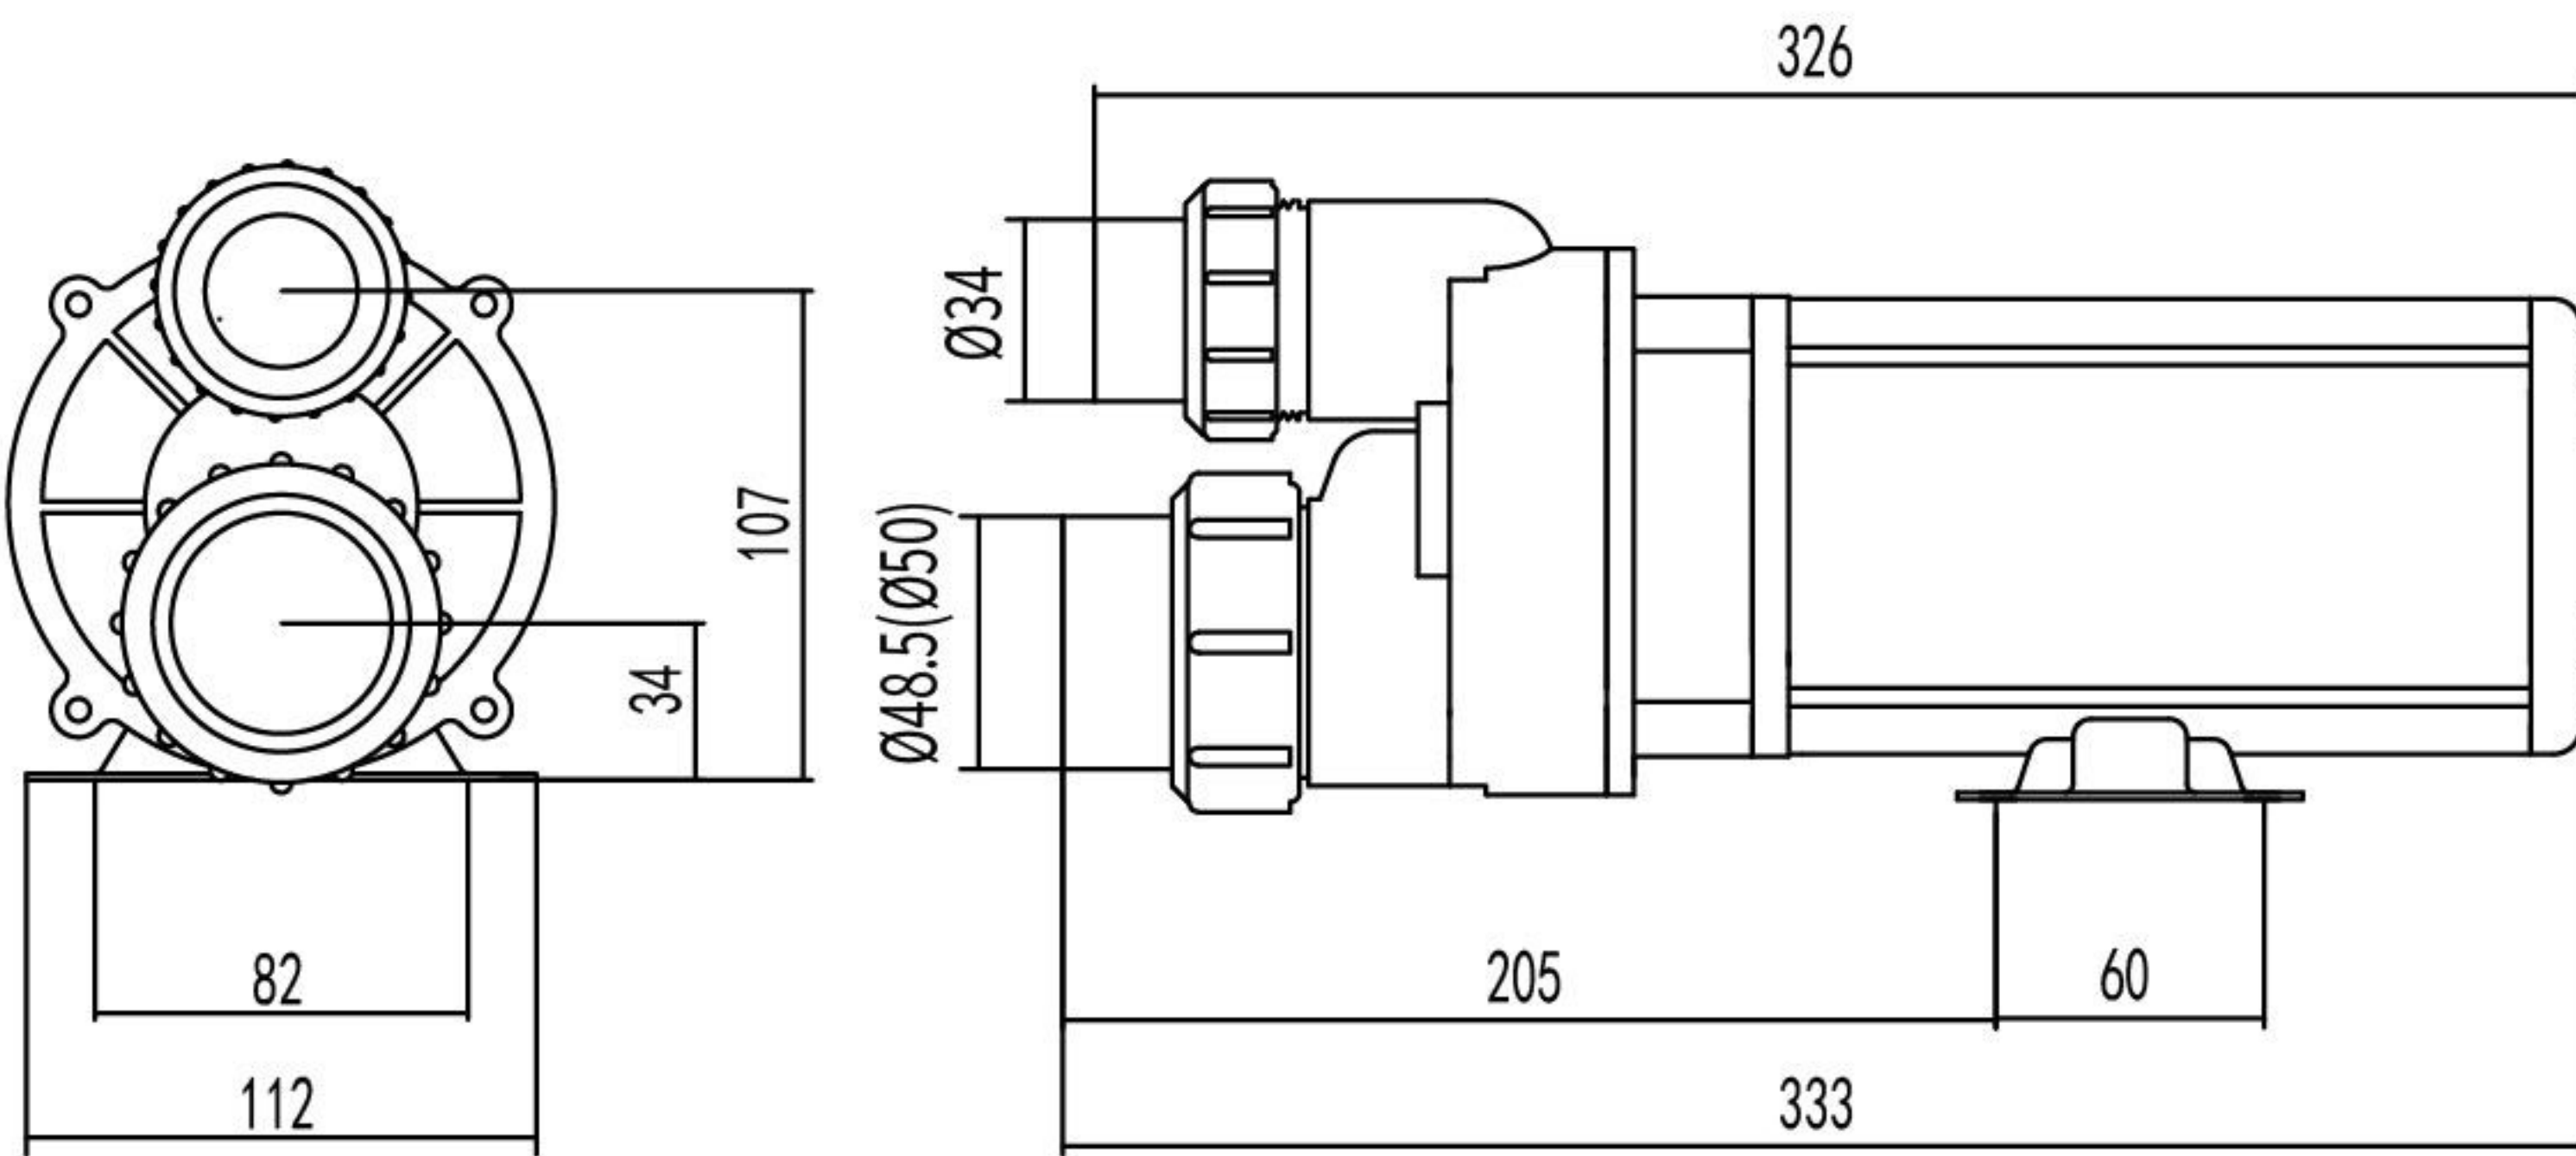

性能曲线 Performance Curves

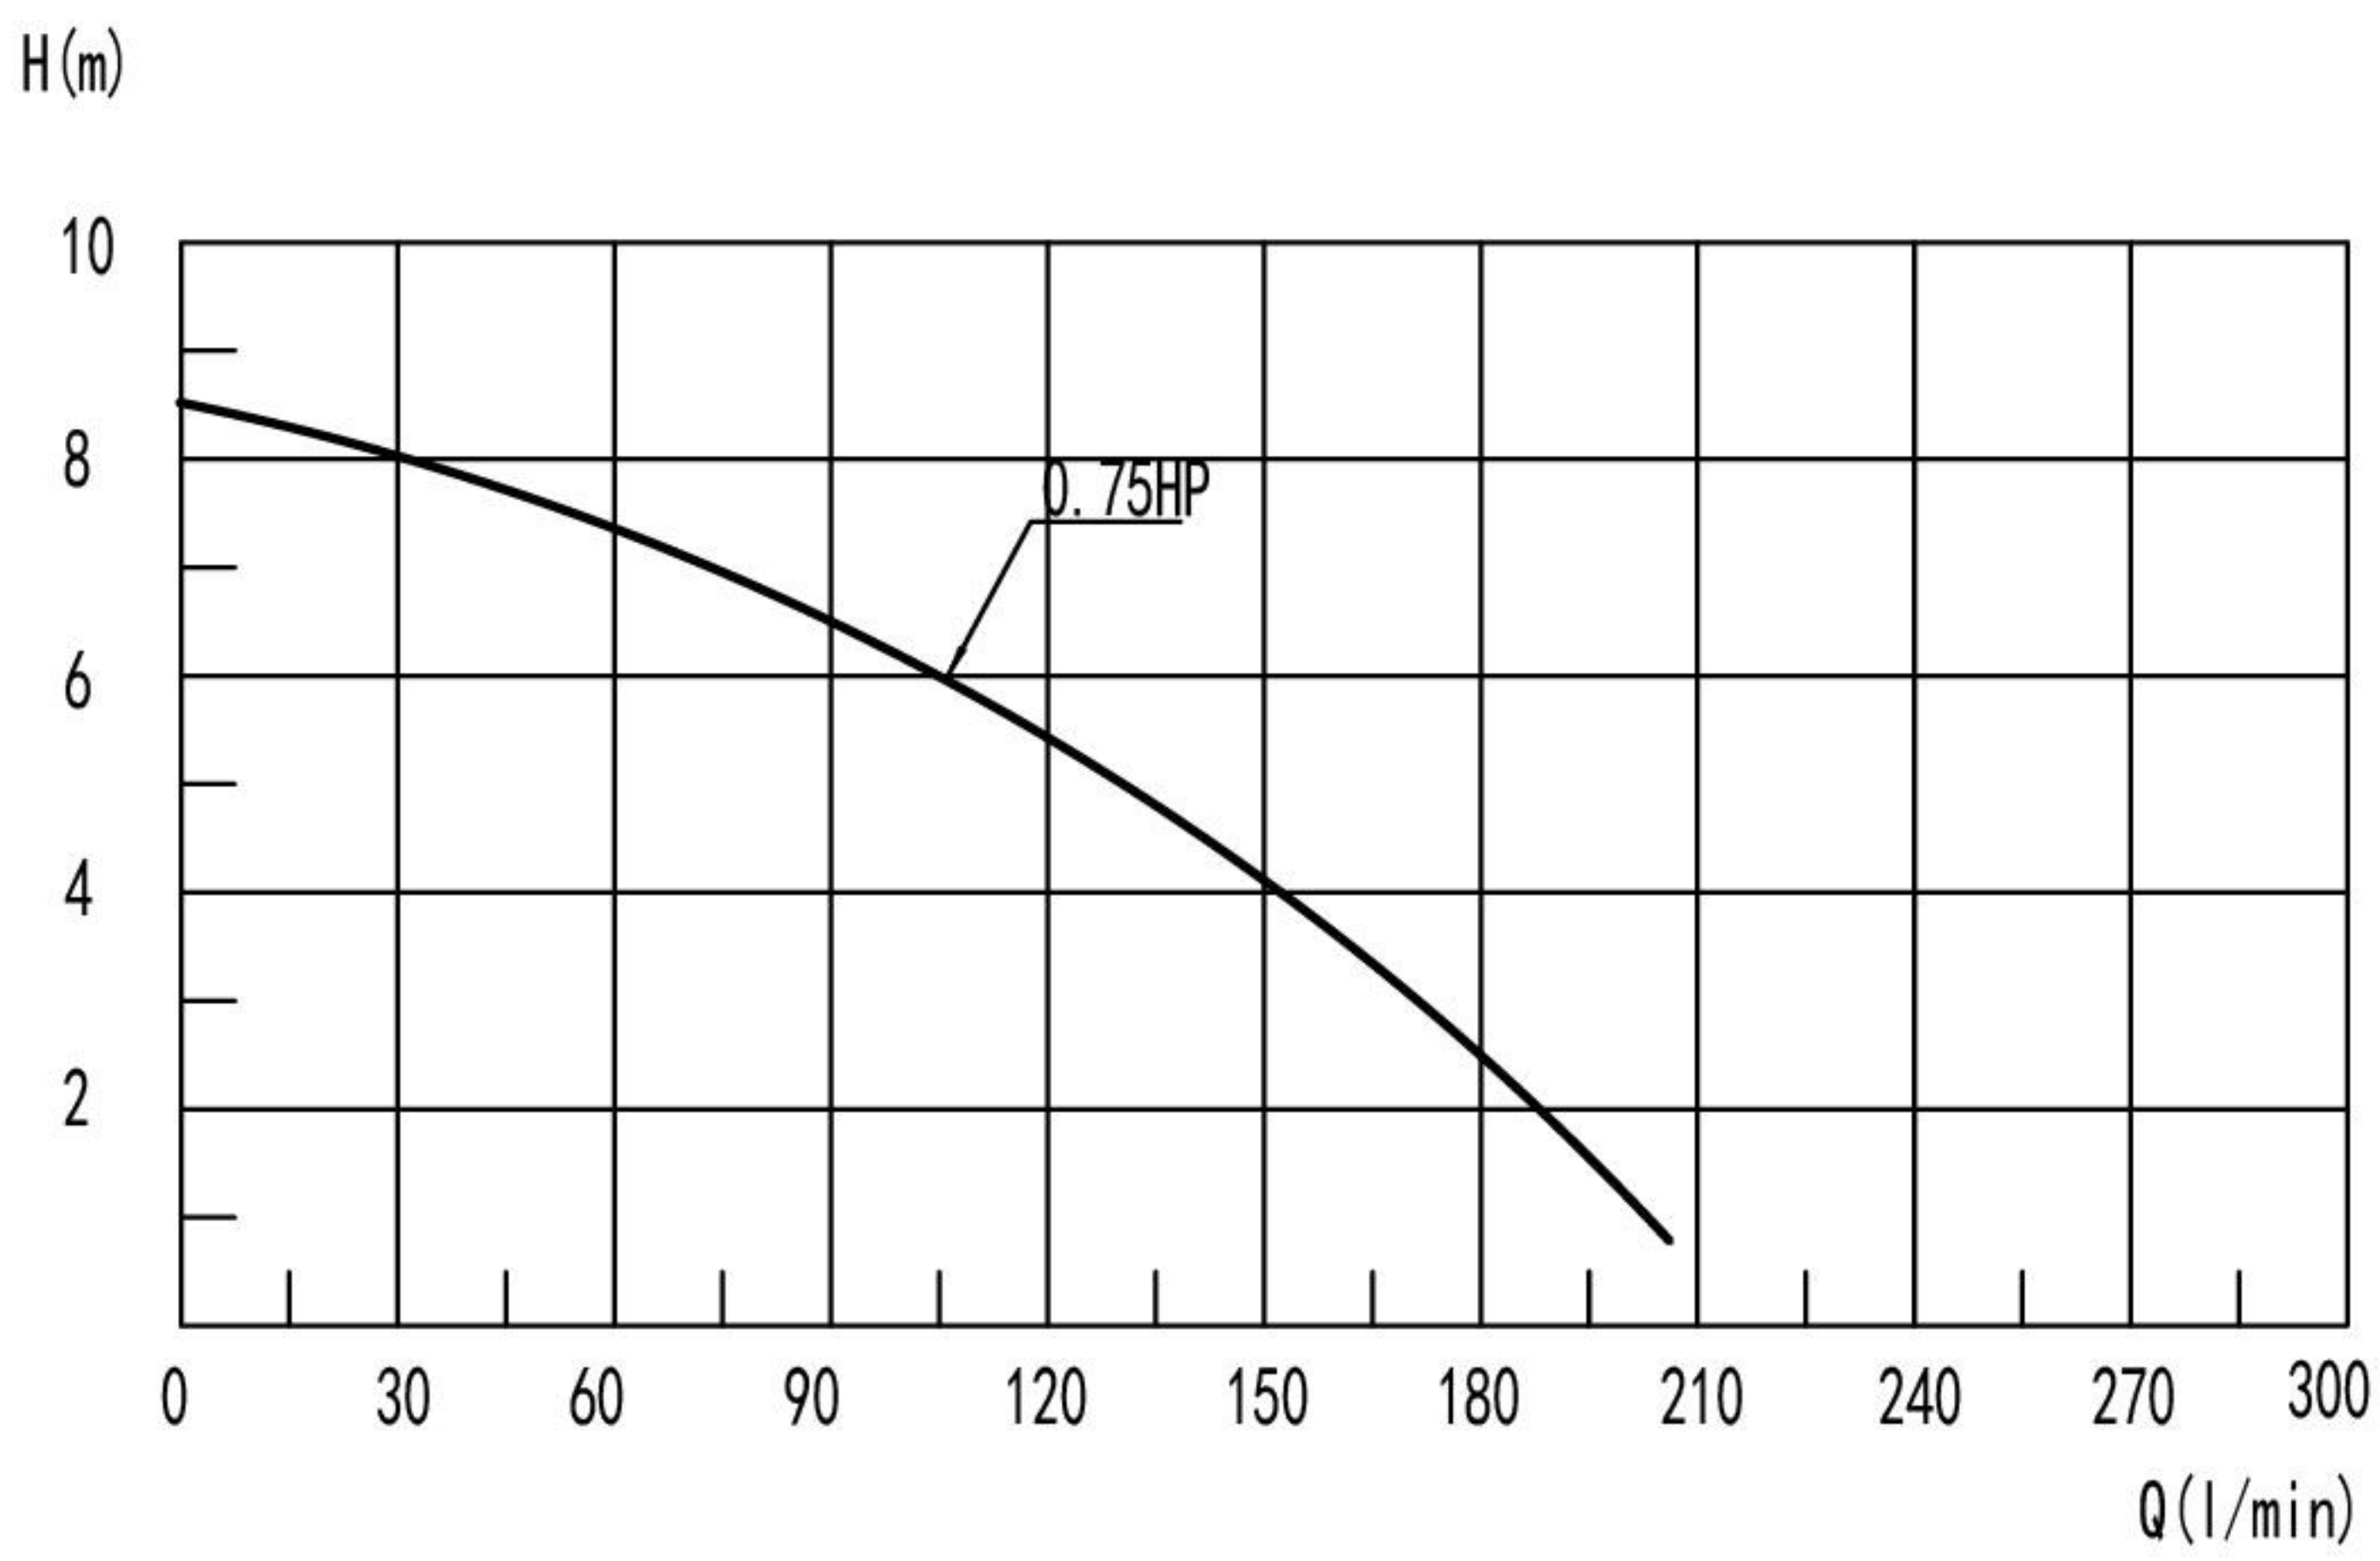

UL E351970

TUV EN 60335-1:2012/A2:2019
EN 60335-2-41:2003/A2:2010
EN 62233:2008

CE EN 60335-1:2012/A2:2019
EN 60335-2-41:2003/A2:2010
EN 62233:2008

技术参数 Technical Parameter List

型号 Model	电压 Voltage	功率 Power		转速 Rotating Speed (r/min)	最大扬程 Maximum Lift (m)	最大流量 Maximum Flow (l/min)	绝缘等级 Insulation Class	防护等级 Protection Grade	毛重 Gross Weight (kg)	认证 Certification
		Kw	HP							
DXD-9A	230v/50Hz	0.55	0.75	2850	8.5	208	F	IPX5	6.0	TUV CE
DXD-9A	230v/60Hz	0.55	0.75	3450	8.5	208	F	IPX5	6.0	
DXD-9A	115v/60Hz	0.55	0.75	3450	8.5	208	F	IPX5	6.0	UL

包装(Packing):385mm×160mm×145mm