
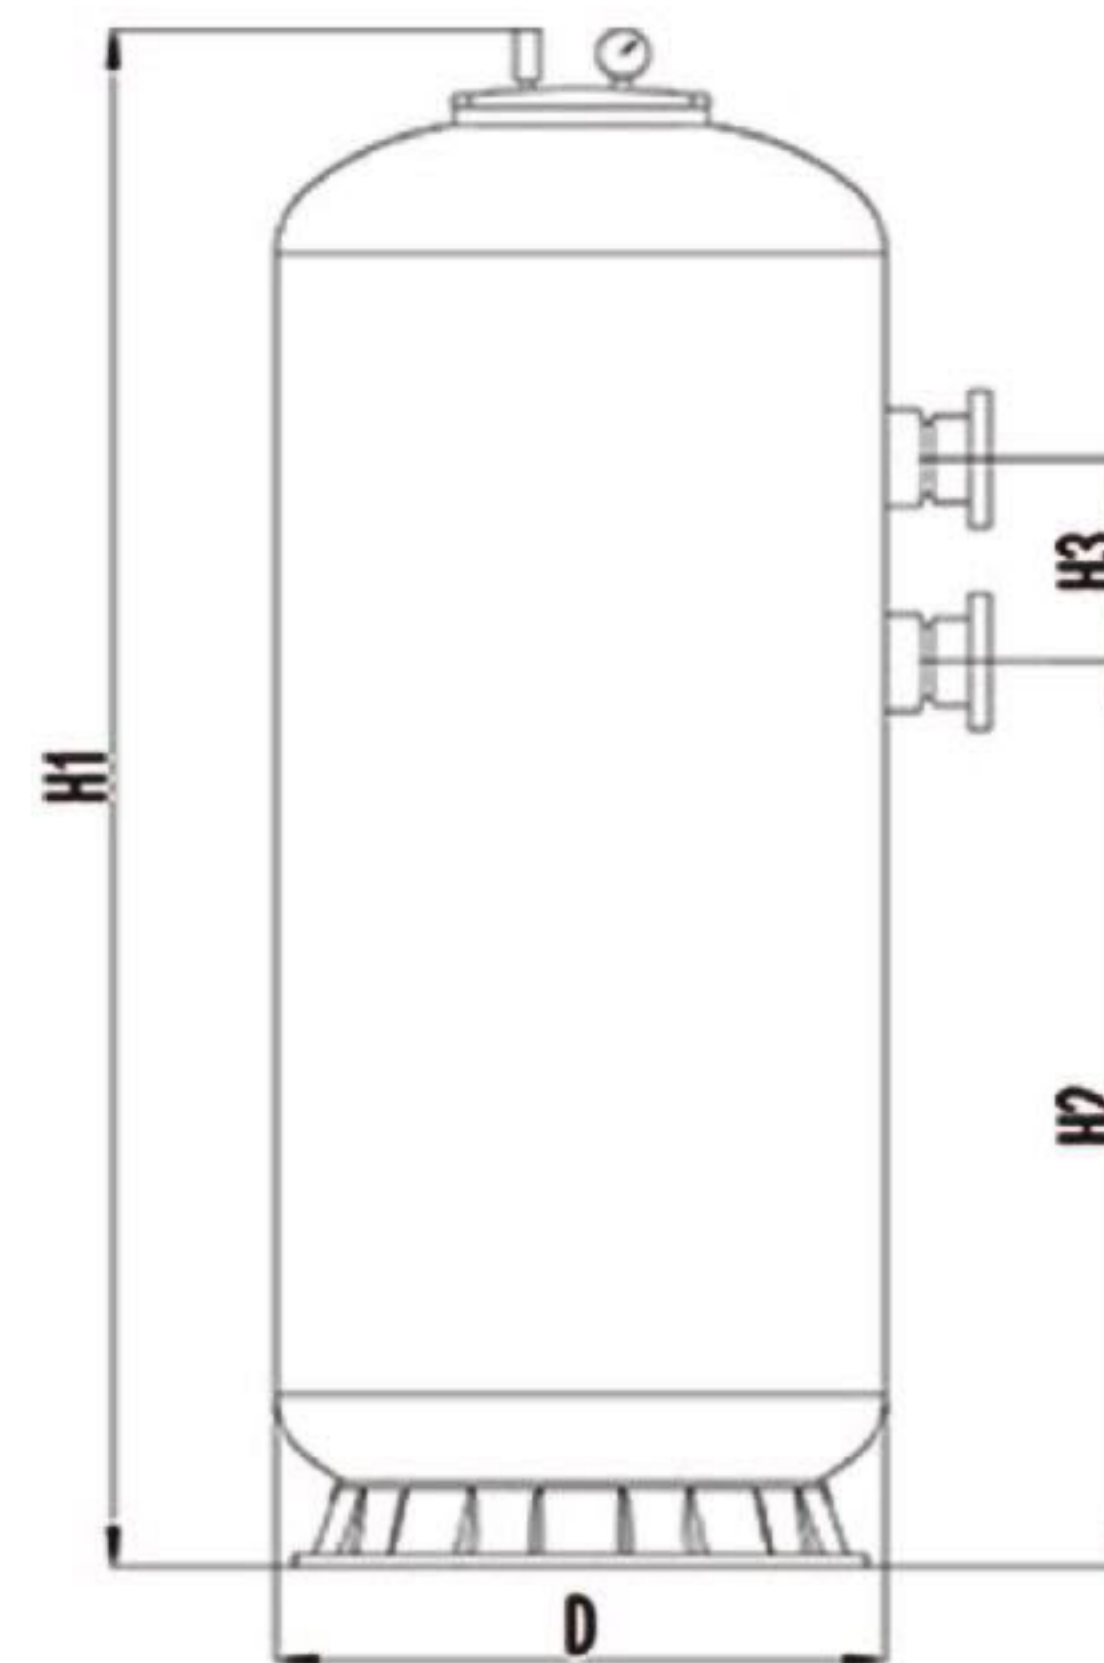


CB-H07400

缸体为玻璃纤维增强塑料缠绕成型而成, 耐磨损、耐腐蚀、不易变形。

设计独特的布水器能均匀的稳定水流, 暗渠排水系统效高。易于安装, 维修、保养方便。出水浊度小于2度。

Tank : voluble molding of fiber glass reinforced plastics , corrosion resistant , good abrasion resistance , deforming-proof . Uniquely distribution make a stable and even water flow to improve drainage system . Easy to install , maintain free . Outlet turbidity : < 2FTU .

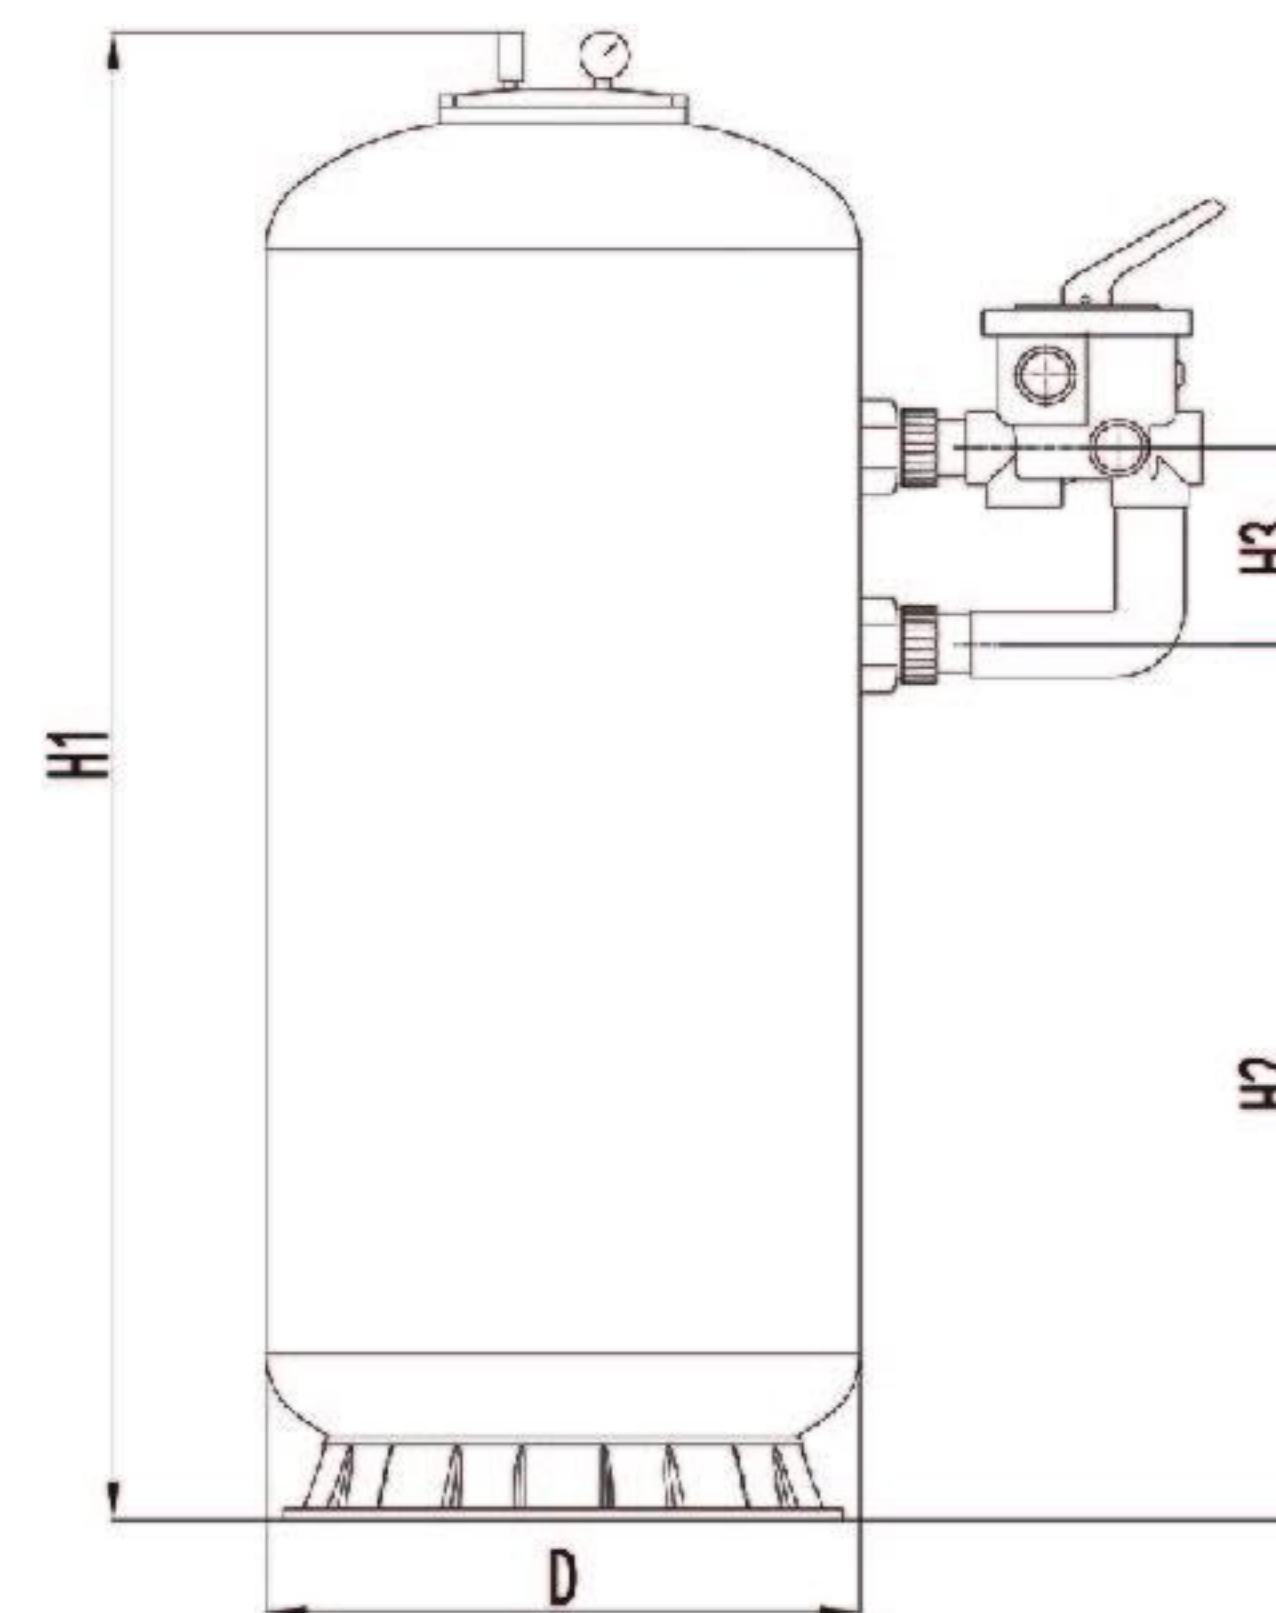

工作条件 Working Conditions

最大工作压力: 2.5kg/cm² (35psi)

工作压力为4kg/cm² 可按需定制

最高承受温度: 45°C

Maximum working pressure: 2.5kg/cm² (35psi)

Working pressure of 4kg/cm² available by special order

Maximum temperature: 45°C

特点 Features

采用环保、优质的强化聚酯和玻璃纤维缠绕而成, 具有良好的耐化学腐蚀和防晒性能。具有出色的过滤能力, 采用多层过滤方式。缸体高度可以根据客户需求定制。

Tank is made of high quality fiber glass which is chemical and sunlight resistance. Excellent filtering ability

The height of tank can be available for the special order.

| 型号 Model | 安装尺寸 (mm) | | | |
|-------------|--------------|-----------|----|-----|
| | D | H1 | H2 | H3 |
| CB-H07400 | 400 | 700-900 | - | 150 |
| CB-H08600 | 600 | 750-1300 | - | 150 |
| CB-H09700 | 700 | 900-1600 | - | 150 |
| CB-H11800 | 800 | 1100-1800 | - | 200 |
| CB-H12900 | 900 | 1200-2100 | - | 200 |
| CB-H131050 | 1050 | 1300-2100 | - | 200 |
| CB-H151200 | 1200 | 1500-2100 | - | 200 |
| CB-H161400 | 1400 | 1600-2100 | - | 300 |

*H2尺寸可以根据客户需要定制。

(H2 size can be customized according to the customers' requirements.)

技术参数 Technical Parameter List

| 型号 Model | 砂缸直径 Filter Diameter | | 砂缸总高 Filter Height | | 设计流量 flow | | 过滤面积 filter area | | 出入水口径 connections | | 所需砂量 required | 包装尺寸 package |
|-------------|-------------------------|--------|-----------------------|--------|-------------------|-----|---------------------|-------|----------------------|--------|------------------|-----------------|
| | mm | inches | mm | inches | m ³ /h | GPM | m ² | sq.ft | mm | inches | kg | mm |
| CB-H07400 | 400 | 21.7 | 900 | 35.4 | 8 | 35 | 0.13 | 1.3 | 50 | 1.5" | 95 | 500*500*1000 |
| CB-H08600 | 600 | 23.6 | 1300 | 51.2 | 14 | 62 | 0.22 | 2.2 | 50 | 1.5" | 315 | 700*700*1400 |
| CB-H09700 | 700 | 27.6 | 1600 | 63.0 | 19 | 84 | 0.35 | 3.4 | 50 | 1.5" | 450 | 800*800*1750 |
| CB-H11800 | 800 | 31.5 | 1800 | 70.9 | 24 | 106 | 0.50 | 4.9 | 63 | 2" | 620 | 900*900*1900 |
| CB-H12900 | 900 | 35.4 | 2100 | 82.7 | 30 | 132 | 0.64 | 6.3 | 63 | 2" | 850 | 1000*1000*2250 |
| CB-H131050 | 1050 | 41.3 | 2100 | 82.7 | 38 | 167 | 0.88 | 8.6 | 63 | 2" | 1450 | 1150*1150*2250 |
| CB-H151200 | 1200 | 47.2 | 2100 | 82.7 | 42 | 185 | 1.13 | 11.1 | 63 | 2" | 2150 | 1300*1300*2250 |
| CB-H161400 | 1400 | 55.1 | 2100 | 82.7 | 56 | 246 | 1.25 | 12.3 | 90 | 3" | 2650 | 1500*1500*2250 |